




**INTERRUTTORI
MAINS SWITCHES
INTERRUPTEUR SECTEUR
NEZKALTER**

TIPO
TYPE
TYPE
TYP

SV

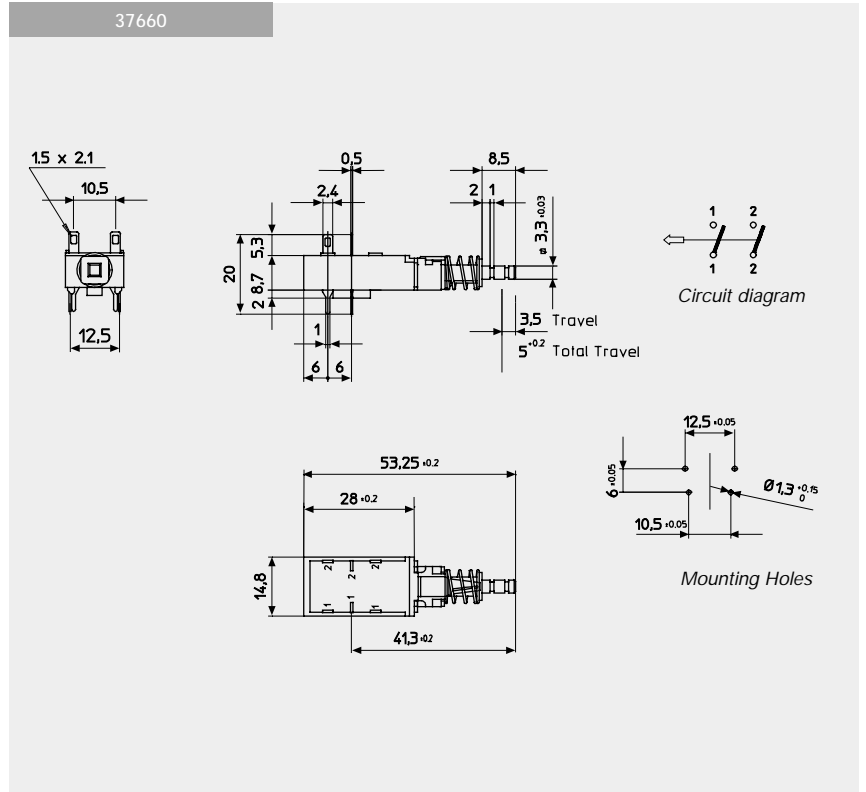

4 CONTATTI PER CS
E A SALDARE

4 CONTACTS FOR P.C.B.
SOLDER

4 CONTACTS POUR
C.I. A SOUDER

4 KONTAKTE FÜR
LEITERPLATTEN



Corpo isolante Beige	Insulating body Beige	Corps isolant Beige	Isolierkörper Beige	PPOM UL 94 VO
Astina	Shaft	Coluisseau	Schaft	
Contatti	Contacts	Contacts	Kontakte	Cu + Ag 999
Forza d'inserzione	Insertion force	Force d'insertion	Betätigungskraft	10 N
Temperatura	Temperature	Température	Temperaturbereich	55°C
Dati di targa IEC 1058-1	Nominal data IEC 1058-1	Valeurs nominales IEC 1058-1	Nannschaltlast IEC 1058-1	4 (2) A / 250 V AC
Frequenza	Frequency	Fréquence	Frequenz	50 Hz
Cicli	Cycles	Cycles	Zyklen	10.000
Categoria	Category	Categorie	Kategorie	D
Resistenza alle correnti superf.	Tracking resistance	Résistance courant fuite	Kriechstromfestkeit	PTI 250 V
Dati di targa UL 1054-1	Nominal data UL 1054-1	Valeurs nominales UL 1054-1	Nannschaltlast UL 1054-1	4 A 250 V AC 7A 125 V AC
Carico R/L	R/L load	Charge R/L	R/L Last	Cos φ 0,75 ÷ 0,8
Frequenza	Frequency	Fréquence	Frequenz	50-60 Hz