







**INTERRUTTORI
MAINS SWITCHES
INTERRUPTEUR SECTEUR
NETZSCHALTER**



TIPO
TYPE
TYPE
TYP

SV

37673

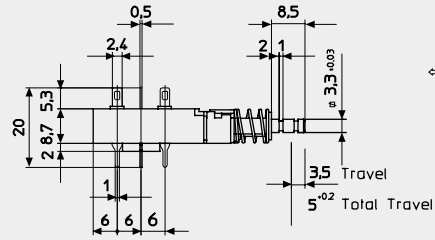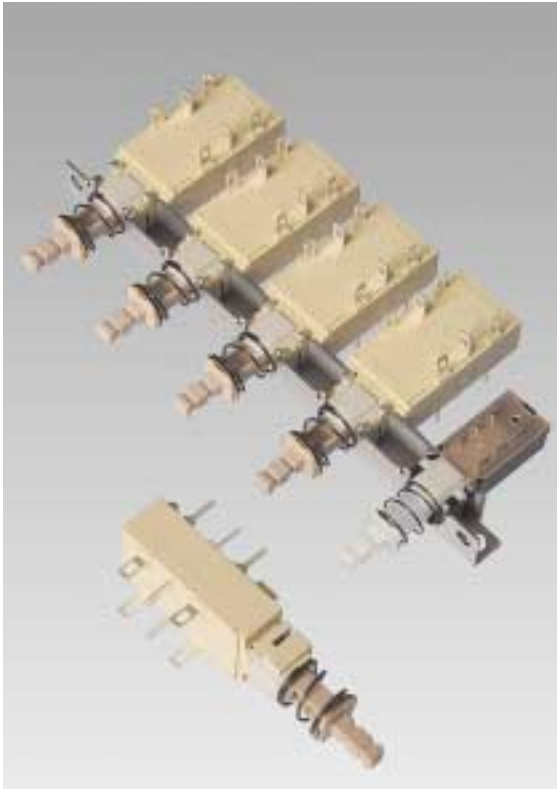

Circuit diagram



Mounting Holes

6 CONTATTI PER CS
E A SALDARE

6 CONTACTS FOR P.C.B.
SOLDER

6 CONTACTS POUR
C.I. A SOUDER

6 KONTAKTE FÜR
LEITERPLATTE



Corpo isolante Beige	<i>Insulating body Beige</i>	Corps isolant Beige	<i>Isolierkörper Beige</i>	PPOM UL 94 VO
Astina	<i>Shaft</i>	Coluisseau	<i>Schaft</i>	
Contatti	<i>Contacts</i>	Contacts	<i>Kontakte</i>	Cu + Ag 999
Forza d'inserzione	<i>Insertion force</i>	Force d'insertion	<i>Betätigungskraft</i>	10 N
Temperatura	<i>Temperature</i>	Température	<i>Temperaturbereich</i>	55°C
Dati di targa IEC 1058-1	<i>Nominal data IEC 1058-1</i>	Valeurs nominales IEC 1058-1	<i>Nannschaltlast IEC 1058-1</i>	4 (2) A 250 V AC
Frequenza	<i>Frequency</i>	Fréquence	<i>Frequenz</i>	50 Hz
Cicli	<i>Cycles</i>	Cycles	<i>Zyklen</i>	10.000
Categoria	<i>Category</i>	Categorie	<i>Kategorie</i>	D
Resistenza alle correnti superf.	<i>Tracking resistance</i>	Résistance courant fuite	<i>Kriechstromfestigkeit</i>	PTI 250 V
Dati di targa UL 1054-1	<i>Nominal data UL 1054-1</i>	Valeurs nominales UL 1054-1	<i>Nannschaltlast UL 1054-1</i>	4A 250 V AC 7A 125 V AC
Carico R/L	<i>R/L Load</i>	Charge R/L	<i>R/L Last</i>	Cos φ 0,75 ÷ 0,8
Frequenza	<i>Frequency</i>	Fréquence	<i>Frequenz</i>	50-60 Hz