




**MICRO INTERRUOTORI**  
**MICRO-SWITCHES**  
**MINI INTERRUPTEURS**  
**MIKROSCHALTER**

TIPO  
 TYPE  
 TYPE  
 TYP

**DATA**

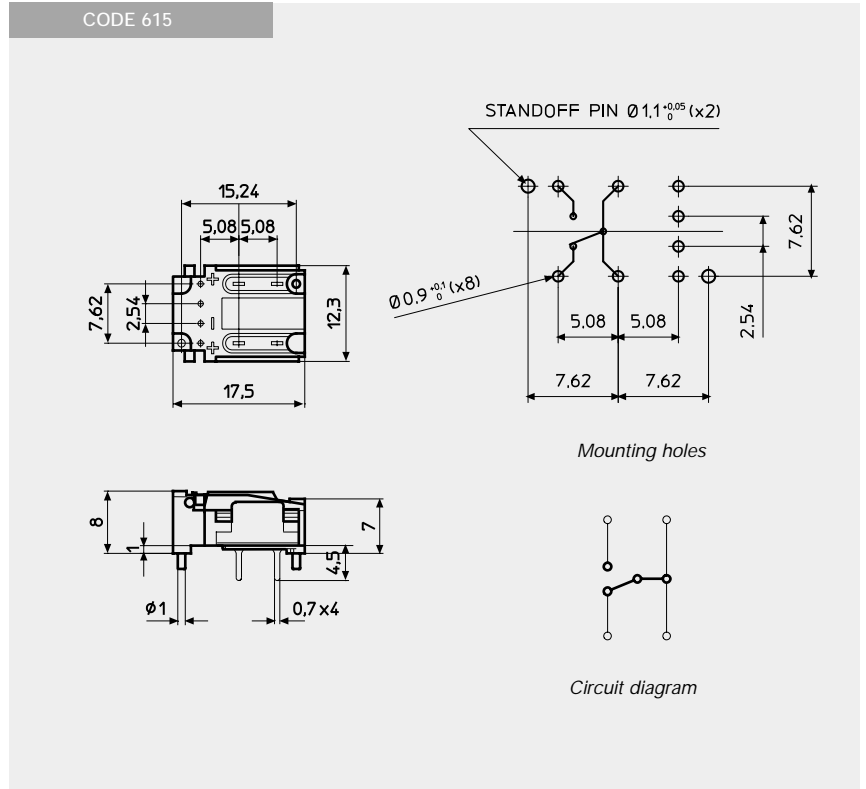

MODULO MOMENTANEO	MOMENTARY MODULE	MODULE MOMENTANE	MOMENTAN MODUL	CODE 615
MODULO BISTABILE	PUSH-PUSH MODULE	MODULE POUSSE-POUSSE	DOPPELDRUCKMODUL	CODE 617

Corpo isolante Nero	Insulating body Black	Corps isolant Noir	solierkörper Schwarz	PPOM UL 94 VO
Tasto	Knob	Bouton	Knopf	ABS
Contatti	Contacts	Contacts	Kontakte	CuZn 37 + Ni + Au
Forza di azionamento	Operating force	Force d'actionnement	Betätigungskraft	≤ 2 N
Corsa del tasto	Knob travel	Course du bouton	Tasthub	≤ 3 mm
Durata meccanica/cicli	Mechanical life/cycles	Durée de vie/cycles	Lebensdauer ( Zyclen)	≤ 5 x 10 <sup>5</sup>
Tempo di rimbalzo	Bounce time	Temp de rebond	Prellzeit	≤ 2 mS
Corrente max. DC	Max. current DC	Intensité max. DC	Max Schaltstrom	10 mA
Tensione max. DC	Max. voltage DC	Tension max. DC	Max Schaltspannung ( DC)	24 V
Potenza max. DC	Max. power DC	Puissance max. DC	Max Schaltspannung ( DC)	240 mW
Resistenza di contatto	Contact resistance	Résistance de contact	Übergangswiderstand	≤ 50 MΩ
Resistenza di isolamento	Insulation resistance	Résistance d'isolement	Isolationswiderstand	≤ 10 <sup>4</sup> MΩ
Capacità fra i contatti	Inter-contacts capacity	Capacité entre contacts	Kapazität zwischen den Kontakten	<0,9 pF
Temperatura	Temperature	Température	Temperaturbereich	-25°C/+ 85°C

SCHEMA PER ORDINAZIONE	ORDER SCHEME	TABLEAU DE COMMANDE	BESTELLSCHEMA	OPTIONAL																																																				
<p>SCHEMA PER ORDINAZIONE</p> <p>ORDER SCHEME</p> <p>TABLEAU DE COMMANDE</p> <p>BESTELLSCHEMA</p>				STANDARD COLOURS																																																				
<p>CODE</p> <table border="1"> <tr> <td>600</td> <td>600 PP</td> <td>601</td> <td>601 PP</td> <td>602</td> <td>602 PP</td> <td>620</td> <td>620 PP</td> <td>621</td> <td>621 PP</td> <td>622</td> <td>622 PP</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>+ 615 = 650</td> <td>+ 617 = 655</td> <td>+ 615 = 651</td> <td>+ 617 = 656</td> <td>+ 615 = 652</td> <td>+ 617 = 657</td> <td>+ 615 = 670</td> <td>+ 617 = 675</td> <td>+ 615 = 671</td> <td>+ 617 = 676</td> <td>+ 615 = 672</td> <td>+ 61 = 677</td> </tr> </table>				600	600 PP	601	601 PP	602	602 PP	620	620 PP	621	621 PP	622	622 PP													+ 615 = 650	+ 617 = 655	+ 615 = 651	+ 617 = 656	+ 615 = 652	+ 617 = 657	+ 615 = 670	+ 617 = 675	+ 615 = 671	+ 617 = 676	+ 615 = 672	+ 61 = 677	<table border="1"> <tr><td></td><td>NE</td></tr> <tr><td></td><td>RO</td></tr> <tr><td></td><td>VE</td></tr> <tr><td></td><td>GC</td></tr> <tr><td></td><td>AR</td></tr> <tr><td></td><td>BU</td></tr> <tr><td></td><td>GS</td></tr> <tr><td></td><td>GI</td></tr> </table>		NE		RO		VE		GC		AR		BU		GS		GI
600	600 PP	601	601 PP	602	602 PP	620	620 PP	621	621 PP	622	622 PP																																													
+ 615 = 650	+ 617 = 655	+ 615 = 651	+ 617 = 656	+ 615 = 652	+ 617 = 657	+ 615 = 670	+ 617 = 675	+ 615 = 671	+ 617 = 676	+ 615 = 672	+ 61 = 677																																													
	NE																																																							
	RO																																																							
	VE																																																							
	GC																																																							
	AR																																																							
	BU																																																							
	GS																																																							
	GI																																																							
<table border="1"> <tr> <td>Colore tasto</td> <td>Colore led A</td> <td>Colore led B</td> </tr> <tr> <td>Knob colour</td> <td>Led A colour</td> <td>Led B colour</td> </tr> <tr> <td>Couleur du bouton</td> <td>Couleur led A</td> <td>Couleur led B</td> </tr> <tr> <td>Knopf Farbe</td> <td>Led A Farbe</td> <td>Led B Farbe</td> </tr> </table>				Colore tasto	Colore led A	Colore led B	Knob colour	Led A colour	Led B colour	Couleur du bouton	Couleur led A	Couleur led B	Knopf Farbe	Led A Farbe	Led B Farbe	LED COLOURS																																								
Colore tasto	Colore led A	Colore led B																																																						
Knob colour	Led A colour	Led B colour																																																						
Couleur du bouton	Couleur led A	Couleur led B																																																						
Knopf Farbe	Led A Farbe	Led B Farbe																																																						
<table border="1"> <tr><td></td><td>RO</td></tr> <tr><td></td><td>GI</td></tr> <tr><td></td><td>VE</td></tr> </table>					RO		GI		VE																																															
	RO																																																							
	GI																																																							
	VE																																																							
<p>... / AU / ... / ... / ...</p>																																																								